

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
7 July 2005 (07.07.2005)

PCT

(10) International Publication Number  
**WO 2005/062683 A2**

(51) International Patent Classification<sup>7</sup>: **H05B 41/00**

(21) International Application Number:  
PCT/GB2004/005413

(22) International Filing Date:  
24 December 2004 (24.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0330019.1 24 December 2003 (24.12.2003) GB

(71) Applicant and

(72) Inventor: **POWELL, David, John** [GB/GB]; 33 Fishpond Lane, Egginton, Derby Derbyshire DE65 6JH (GB).

(74) Agents: **HACKNEY, Nigel et al.**; Mewburn Ellis LLP, York House, 23 Kingsway, London Greater London WC2B 6HP (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS AND METHOD FOR CONTROLLING DISCHARGE LIGHTS

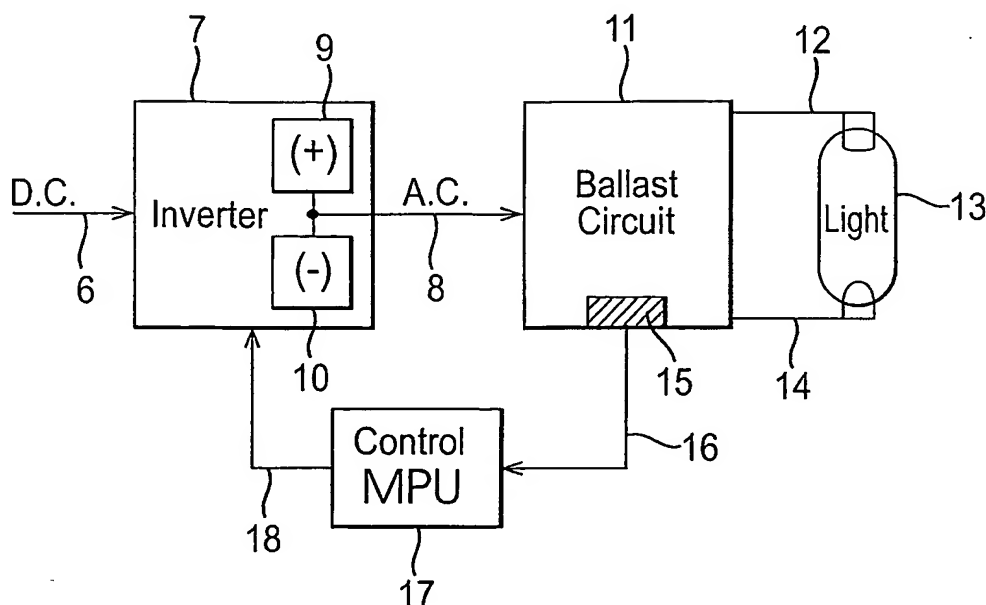

(57) Abstract: Apparatus and method for supplying AC power (e.g. from an inverter) to a discharge light via a ballast circuit formed by a resonant circuit, and controlling the frequency of the AC power signal so as to operate below the natural resonance frequency of the ballast circuit in use after the discharge light has "struck".

WO 2005/062683 A2